

# {14.01}



## Security Units Super Erecta® & MetroMax®

Security Units Super Erecta® & MetroMax® provide **safe storage** and protects valuable materials and sensitive items from loss or pilferage.

**Microban® Antimicrobial Product Protection\***: Metroseal Green, Metroseal Gray and MetroMax Q models feature Microban Antimicrobial Product Protection that helps fight the growth of stain and odor-causing bacteria to keep product cleaner between cleanings.

**Ready View of Contents**: Heavy-gauge open wire construction keeps the entire contents of the unit visible at all times, making it easy to check inventory.

**Adjustable, Optional Intermediate Shelves**: Patented, easily adjustable shelf designs — Super Erecta EZ-ADD, Super Adjustable Super Erecta, and MetroMax Q — allow flexibility to meet changing needs. Can be positioned in 1" (25 mm) increments along the entire height of post.

### Choose from Stationary or Mobile Standard and Heavy-Duty Configurations:

**Safe Transportation**: Mobile, security trucks provide the advantage of quick, protective transportation.

**Easy Cleaning of Storage Areas**: Mobile units move easily from walls to allow thorough cleaning of floors and walls.

**Mobile Units**: Available in Standard and Heavy-Duty models Heavy-Duty units offer increased rigidity and durability for applications such as crossing thresholds.

**Time Saving Assembly**: Metro security units assemble quickly — right out of the box.

**Shipped Knocked-Down**: Saves on freight

**Hinged Doors**: Each door opens 270 degrees and can be secured along the sides of the unit with a 1/4 turn door handle locking system that accommodates a pad lock.

### Locking


**Standard Pad lock**: Not included



Super Erecta® Chrome  
Mobile Security



MetroMax® Q  
Stationary Security

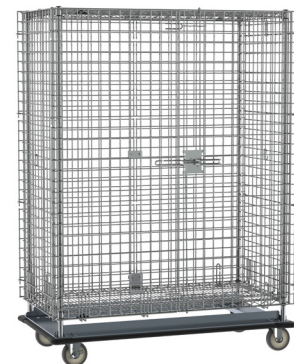

Super Erecta  
Heavy Duty Security  
with a dolly base and optional  
intermediate shelves.



NOTE: Super Erecta and MetroMax options are NSF Listed.

All Metro Catalog Sheets are available on our website: [metro.com](http://metro.com)

## Pre-Configured Security Units with Intermediate Shelves



### Super Erecta Stationary Pre-Configured Security Units with Intermediate Shelves

- Pre-Configured Security Units come with (2) Intermediate Shelves

Chrome* Cat. No.	Chrome Cat. No.	Metroseal Gray Cat. No.	Stainless Steel Cat. No.	Width		Length		Height		Fits Shelf		Approx. Pkd. Wt.	
				in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kg
SEC33C-2EZ	SEC33C-2SE	SEC33K4-2SE	SEC33S-2SE	21 <sup>1</sup> / <sub>2</sub>	546	38 <sup>1</sup> / <sub>2</sub>	980	66 <sup>13</sup> / <sub>16</sub>	1695	18x36	457x914	146.5	66
SEC35C-2EZ	SEC35C-2SE	SEC35K4-2SE	SEC35S-2SE	21 <sup>1</sup> / <sub>2</sub>	546	50 <sup>1</sup> / <sub>2</sub>	1295	66 <sup>13</sup> / <sub>16</sub>	1695	18x48	457x1219	173.2	79
SEC53C-2EZ	SEC53C-2SE	SEC53K4-2SE	SEC53S-2SE	27 <sup>1</sup> / <sub>4</sub>	692	38 <sup>1</sup> / <sub>2</sub>	980	66 <sup>13</sup> / <sub>16</sub>	1695	24x36	610x914	167.2	76
SEC55C-2EZ	SEC55C-2SE	SEC55K4-2SE	SEC55S-2SE	27 <sup>1</sup> / <sub>4</sub>	692	50 <sup>1</sup> / <sub>2</sub>	1295	66 <sup>13</sup> / <sub>16</sub>	1695	24x48	610x1219	202	92
SEC56C-2EZ	SEC56C-2SE	SEC56K4-2SE	SEC56S-2SE	27 <sup>1</sup> / <sub>4</sub>	692	62 <sup>1</sup> / <sub>2</sub>	1587	66 <sup>13</sup> / <sub>16</sub>	1695	24x60	610x1524	225.9	102


\* Comes with (2) EZ ADD Intermediate Shelves

### Super Erecta Mobile Pre-Configured Security Units with Intermediate Shelves

- Pre-Configured Security Units come with (2) Intermediate Shelves

**Standard-Duty Stem Caster Models:** feature 5" (127 mm) swivel casters.

Please note model numbers for specific caster types.

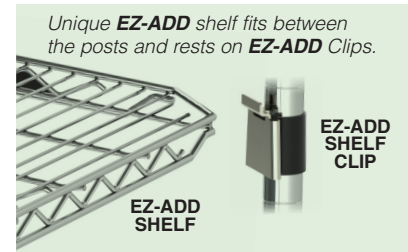


Chrome* (2) 5MP (2) 5MPB Casters Cat. No.	Chrome (2) 5MP (2) 5MPB Casters Cat. No.	Metroseal Gray (2) 5PC (2) 5PCB Casters Cat. No.	Stainless Steel (2) 5MPGSA (2) 5MPBGSA Casters Cat. No.	Width		Length		Height		Fits Shelf		Approx. Pkd. Wt.	
				in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kg
SEC33EC-2EZ	SEC33EC-2SE	SEC33VK4-2SE	SEC33S-SD-2SE	21 <sup>1</sup> / <sub>2</sub>	546	40 <sup>3</sup> / <sub>4</sub>	1035	68 <sup>1</sup> / <sub>2</sub>	1740	18x36	457x914	155	70
SEC35EC-2EZ	SEC35EC-2SE	SEC35VK4-2SE	SEC35S-SD-2SE	21 <sup>1</sup> / <sub>2</sub>	546	52 <sup>3</sup> / <sub>4</sub>	1340	68 <sup>1</sup> / <sub>2</sub>	1740	18x48	457x1219	182	82
SEC53EC-2EZ	SEC53EC-2SE	SEC53VK4-2SE	SEC53S-SD-2SE	27 <sup>1</sup> / <sub>4</sub>	692	40 <sup>3</sup> / <sub>4</sub>	1035	68 <sup>1</sup> / <sub>2</sub>	1740	24x36	610x914	176	80
SEC55EC-2EZ	SEC55EC-2SE	SEC55VK4-2SE	SEC55S-SD-2SE	27 <sup>1</sup> / <sub>4</sub>	692	52 <sup>3</sup> / <sub>4</sub>	1340	68 <sup>1</sup> / <sub>2</sub>	1740	24x48	610x1219	210	95
SEC56EC-2EZ	SEC56EC-2SE	SEC56VK4-2SE	SEC56S-SD-2SE	27 <sup>1</sup> / <sub>4</sub>	692	65	1651	68 <sup>1</sup> / <sub>2</sub>	1740	24x60	610x1524	234	106

\* Comes with (2) EZ ADD Intermediate Shelves

**Heavy-Duty Models:** feature aluminum dollies with wraparound bumpers and 5" (127mm) diameter casters.

Chrome (2) B5P (2) B5PB Casters Cat. No.	Metroseal Gray (2) B5P (2) B5PB Casters Cat. No.	Stainless Steel (2) B5PGSA (2) B5PBGSA Casters Cat. No.	Width		Length		Height		Fits Shelf		Approx. Pkd. Wt.	
			in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kg
SEC53LC-2SE	SEC53LK4-2SE	SEC53S-HD-2SE	28 <sup>1</sup> / <sub>16</sub>	713	38 <sup>1</sup> / <sub>2</sub>	980	68 <sup>1</sup> / <sub>2</sub>	1740	24x36	610x914	223	101
SEC55LC-2SE	SEC55LK4-2SE	SEC55S-HD-2SE	28 <sup>1</sup> / <sub>16</sub>	713	50 <sup>1</sup> / <sub>2</sub>	1295	68 <sup>1</sup> / <sub>2</sub>	1740	24x48	610x1219	252	114
SEC56LC-2SE	SEC56LK4-2SE	SEC56S-HD-2SE	28 <sup>1</sup> / <sub>16</sub>	713	63 <sup>1</sup> / <sub>8</sub>	1600	68 <sup>1</sup> / <sub>2</sub>	1740	24x60	610x1524	260	118

**NOTE:** Given height is for unit without dolly or casters (depending on model chosen). For approximate overall unit height add chosen caster diameter plus 1" (25mm). The stainless steel version of the HD pre-configured units feature a stainless steel dolly.

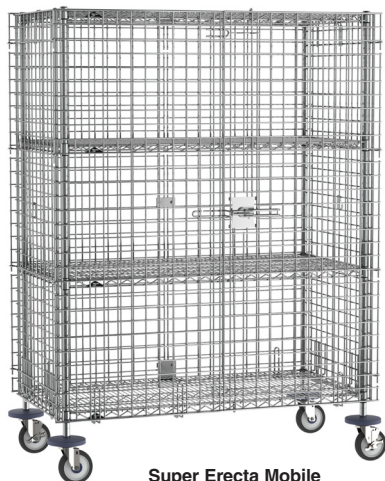

Super Erecta Mobile  
Pre-Configured Security Units  
with Intermediate Shelves.

## Pre-Configured Security Units with Intermediate Shelves



### MetroMax Stationary Units

- Pre-Configured Security Units come with (2) Intermediate Shelves

MetroMax Q Cat. No.	Width		Length		Height		Fits Shelf		Approx. Pkd. Wt.	
	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kg
<b>MQSEC53E-2MQ</b>	26 <sup>15</sup> / <sub>16</sub>	685	38 <sup>7</sup> / <sub>8</sub>	987	66 <sup>3</sup> / <sub>16</sub>	1681	24x36	610x914	168.5	76
<b>MQSEC55E-2MQ</b>	26 <sup>15</sup> / <sub>16</sub>	685	50 <sup>7</sup> / <sub>8</sub>	1292	66 <sup>3</sup> / <sub>16</sub>	1681	24x48	610x1219	191.8	87
<b>MQSEC56E-2MQ</b>	26 <sup>15</sup> / <sub>16</sub>	685	62 <sup>7</sup> / <sub>8</sub>	1597	66 <sup>3</sup> / <sub>16</sub>	1681	24x60	610x1524	225.7	102

### MetroMax Stem Caster Mobile Units

MetroMax Q  
(2) 5PCX  
(2) 5PCBX  
Casters  
Cat. No.

MetroMax Q Cat. No.	Width		Length		Height		Fits Shelf		Approx. Pkd. Wt.	
	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kg
<b>MQSEC53VE-2MQ</b>	27 <sup>13</sup> / <sub>16</sub>	707	40 <sup>3</sup> / <sub>4</sub>	1035	67 <sup>13</sup> / <sub>16</sub>	1723	24x36	610x914	176	80
<b>MQSEC55VE-2MQ</b>	27 <sup>13</sup> / <sub>16</sub>	707	52 <sup>3</sup> / <sub>4</sub>	1340	67 <sup>13</sup> / <sub>16</sub>	1723	24x48	610x1219	200	91
<b>MQSEC56VE-2MQ</b>	27 <sup>13</sup> / <sub>16</sub>	707	64 <sup>3</sup> / <sub>4</sub>	1645	67 <sup>13</sup> / <sub>16</sub>	1723	24x60	610x1524	234	106

### MetroMax Heavy-Duty Mobile Units

Mounted on aluminum dolly with 5" (127 mm) plate casters and wraparound bumpers.

MetroMax Q  
(2) B5P  
(2) B5PB  
Casters  
Cat. No.

MetroMax Q Cat. No.	Width		Length		Height		Fits Shelf		Approx. Pkd. Wt.	
	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kg
<b>MQSEC53LE-2MQ</b>	28 <sup>1</sup> / <sub>16</sub>	713	39 <sup>1</sup> / <sub>8</sub>	994	68 <sup>1</sup> / <sub>2</sub>	1740	24x36	610x914	223	101
<b>MQSEC55LE-2MQ</b>	28 <sup>1</sup> / <sub>16</sub>	713	51 <sup>1</sup> / <sub>8</sub>	1299	68 <sup>1</sup> / <sub>2</sub>	1740	24x48	610x1219	252	114
<b>MQSEC56LE-2MQ</b>	28 <sup>1</sup> / <sub>16</sub>	713	63 <sup>1</sup> / <sub>8</sub>	1603	68 <sup>1</sup> / <sub>2</sub>	1740	24x60	610x1524	260	118

**NOTE:** Given height is for unit without dolly or casters (depending on model chosen). For approximate overall unit height add chosen caster diameter plus 1" (25 mm).



**MetroMax Mobile  
Pre-Configured Security Units**  
with Intermediate Shelves.

## Super Erecta® Security Units

- Standard Units consist of top and bottom wire shelves, tri-lobal steel posts, wire enclosures, and doors. Casters and bumpers are included with mobile units. Intermediate shelves are sold separately.

**Units DO NOT include intermediate shelves.**  
Intermediate shelves must be ordered separately.

### Super Erecta Shelf Stationary Security

Chrome Cat. No.	Metroseal Green Cat. No.	Metroseal Gray Cat. No.	Stainless Steel Cat. No.	Width		Length		Height		Fits Shelf		Approx. Pkd. Wt.	
				in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kg
SEC33C	SEC33K3	SEC33K4	SEC33S	21½	546	38½	980	66 <sup>13</sup> / <sub>16</sub>	1695	18x36	457x914	140	64
SEC35C	SEC35K3	SEC35K4	SEC35S	21½	546	50½	1295	66 <sup>13</sup> / <sub>16</sub>	1695	18x48	457x1219	159	72
SEC53C	SEC53K3	SEC53K4	SEC53S	27¼	692	38½	980	66 <sup>13</sup> / <sub>16</sub>	1695	24x36	610x914	156	71
SEC55C	SEC55K3	SEC55K4	SEC55S	27¼	692	50½	1295	66 <sup>13</sup> / <sub>16</sub>	1695	24x48	610x1219	176	80
SEC56C	SEC56K3	SEC56K4	SEC56S	27¼	692	62½	1587	66 <sup>13</sup> / <sub>16</sub>	1695	24x60	610x1524	197	90
SEC63C	—	—	SEC63S	33½	851	38½	980	66 <sup>13</sup> / <sub>16</sub>	1695	30x36	760x914	169	77
SEC65C	—	—	SEC65S	33½	851	50½	1295	66 <sup>13</sup> / <sub>16</sub>	1695	30x48	760x1219	195	89
SEC66C	—	—	SEC66S	33½	851	62½	1587	66 <sup>13</sup> / <sub>16</sub>	1695	30x60	760x1524	217	99

### Super Erecta Shelf Mobile Security

**Standard-Duty Stem Caster Models:** feature 5" (127 mm) swivel casters. Please note model numbers for specific caster types.

Chrome (2) 5MP (2) 5MPB Casters Cat. No.	Metroseal Green (2) 5PC (2) 5PCB Casters Cat. No.	Metroseal Gray (2) 5PC (2) 5PCB Casters Cat. No.	Width		Length		Height		Fits Shelf		Approx. Pkd. Wt.	
			in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kg
SEC33EC	SEC33VK3	SEC33VK4	21½	546	40¾	1035	68 ½	1740	18x36	457x914	148	67
SEC35EC	SEC35VK3	SEC35VK4	21½	546	52¾	1340	68 ½	1740	18x48	457x1219	167	76
SEC53EC	SEC53VK3	SEC53VK4	27¼	692	40¾	1035	68 ½	1740	24x36	610x914	164	75
SEC55EC	SEC55VK3	SEC55VK4	27¼	692	52¾	1340	68 ½	1740	24x48	610x1219	184	84
SEC56EC	SEC56VK3	SEC56VK4	27¼	692	65	1651	68 ½	1740	24x60	610x1524	205	93
SEC63EC	—	—	33½	851	40¾	1035	68 ½	1740	30x36	760x914	177	81
SEC65EC	—	—	33½	851	52¾	1340	68 ½	1740	30x48	760x1219	204	93
SEC66EC	—	—	33½	851	65	1651	68 ½	1740	30x60	760x1524	225	102

**Casters:** 5MP and 5MPB (with locking brake) feature a polyurethane tread.

5PC and 5PCB (with locking brake) casters feature a polymer horn and resist rusting. They are recommended for high-moisture environments.

### Stainless Steel: Casters must be ordered separately on "SD" models.

Cat. No.	Description	Width		Length		Height		Fits Shelf		Approx. Pkd. Wt.	
		in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kg
SEC33S-SD	Standard Duty	21½	546	40¾	1035	62	1575	18x36	457x914	140	64
SEC35S-SD	Standard Duty	21½	546	52¾	1340	62	1575	18x48	457x1219	159	72
SEC53S-SD	Standard Duty	27¼	692	40¾	1035	62	1575	24x36	610x914	156	71
SEC55S-SD	Standard Duty	27¼	692	52¾	1340	62	1575	24x48	610x1219	176	80
SEC56S-SD	Standard Duty	27¼	692	65	1651	62	1575	24x60	610x1524	197	90
SEC63S-SD	Standard Duty	33½	851	40¾	1035	62	1575	30x36	760x914	169	77
SEC65S-SD	Standard Duty	33½	851	52¾	1340	62	1575	30x48	760x1219	195	89
SEC66S-SD	Standard Duty	33½	851	65	1651	62	1575	30x60	760x1524	217	99

### Heavy-Duty Models: feature aluminum dollies with wraparound bumpers and 5" (127mm) diameter casters.

Chrome Cat. No.	Metroseal Green Cat. No.	Metroseal Gray Cat. No.	Caster Type	Width		Length		Height		Fits Shelf		Approx. Pkd. Wt.	
				in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kg
SEC53LC	SEC53LK3	SEC53LK4	(2) B5P/B5PB	28 1/16	713	38 ½	980	68 ½	1740	24x36	610x914	189	86
SEC55LC	SEC55LK3	SEC55LK4	(2) B5P/B5PB	28 1/16	713	50 ½	1285	68 ½	1740	24x48	610x1219	212	96
SEC56LC	SEC56LK3	SEC56LK4	(2) B5P/B5PB	28 1/16	713	63 ½	1600	68 ½	1740	24x60	610x1524	237	108

**NOTE:** Given height is for unit without dolly or casters (depending on model chosen). For approximate overall unit height add chosen caster diameter plus 1" (25 mm).

**CAUTION:** Large casters can create a tipping hazard. On 18" (457 mm) security units, do not use casters larger than 5" (127 mm) in diameter.

### Intermediate Shelves for Super Erecta Shelf Security Units

Chrome Cat. No.	Metroseal Green Cat. No.	Metroseal Gray Cat. No.	Super Erecta Pro Cat. No.	Stainless Steel Cat. No.	EZ-ADD Chrome Cat. No.	EZ-ADD Metroseal Green Cat. No.	Super Adjustable Chrome Cat. No.	Super Adjustable Metroseal Green Cat. No.	Super Adjustable Stainless Steel Cat. No.	Width	
										in.	mm
1836NC	1836NK3	1836NK4	PR1836NK3	1836NS	EZA-1836NC	EZA-1836NK3	A1836NC	A1836NK3	A1836NS	18x36	457x914
1848NC	1848NK3	1848NK4	PR1848NK3	1848NS	EZA-1848NC	EZA-1848NK3	A1848NC	A1848NK3	A1848NS	18x48	457x1219
2436NC	2436NK3	2436NK4	PR2436NK3	2436NS	EZA-2436NC	EZA-2436NK3	A2436NC	A2436NK3	A2436NS	24x36	610x914
2448NC	2448NK3	2448NK4	PR2448NK3	2448NS	EZA-2448NC	EZA-2448NK3	A2448NC	A2448NK3	A2448NS	24x48	610x1219
2460NC	2460NK3	2460NK4	PR2460NK3	2460NS	EZA-2460NC	EZA-2460NK3	A2460NC	A2460NK3	A2460NS	24x60	610x1524
3036NC	3036NK3	3036NK4	—	3036NS	—	—	—	—	—	30x36	760x914
3048NC	3048NK3	3048NK4	—	3048NS	—	—	—	—	—	30x48	760x1219
3060NC	3060NK3	3060NK4	—	3060NS	—	—	—	—	—	30x60	760x1524

## MetroMax® Security Units

- Optional intermediate shelves: MetroMax Q quick adjust shelves or corrosion proof MetroMax i. Microban antimicrobial product protection is built into the shelf mats only.
- Standard Units consist of taupe epoxy coated top and bottom wire shelves, tri-lobal steel posts, wire enclosures, and doors. Casters and bumpers are included with mobile units. Intermediate shelves are sold separately.

**Units DO NOT include intermediate shelves.**  
Intermediate shelves must be ordered separately.

## MetroMax Stationary Units

MetroMax Cat. No.	Actual Outside Dimensions (including handle)						Fits Shelf		Approx. Pkd. Wt.	
	Width		Length		Height		in.	mm	lbs.	kg
<b>MQSEC53E</b>	26 <sup>15</sup> / <sub>16</sub>	685	38 <sup>3</sup> / <sub>8</sub>	987	66 <sup>3</sup> / <sub>16</sub>	1681	24 x 36	610 x 914	150	68
<b>MQSEC55E</b>	26 <sup>15</sup> / <sub>16</sub>	685	50 <sup>7</sup> / <sub>8</sub>	1292	66 <sup>3</sup> / <sub>16</sub>	1681	24 x 48	610 x 1219	158	72
<b>MQSEC56E</b>	26 <sup>15</sup> / <sub>16</sub>	685	62 <sup>7</sup> / <sub>8</sub>	1597	66 <sup>3</sup> / <sub>16</sub>	1681	24 x 60	610 x 1524	163	74

Note: Leveling foot on post can be adjusted up to 1" (25 mm) to compensate for uneven floors.

## MetroMax Stem Caster Mobile Units

Cat. No.	Actual Outside Dimensions (including bumpers and handle)						Fits Shelf		Approx. Pkd. Wt.	
	Width		Length		Height		in.	mm	lbs.	kg
<b>MQSEC53VE</b>	27 <sup>13</sup> / <sub>16</sub>	707	40 <sup>3</sup> / <sub>4</sub>	1035	67 <sup>13</sup> / <sub>16</sub>	1723	24x36	610x914	168	76
<b>MQSEC55VE</b>	27 <sup>13</sup> / <sub>16</sub>	707	52 <sup>3</sup> / <sub>4</sub>	1340	67 <sup>13</sup> / <sub>16</sub>	1723	24x48	610x1219	178	81
<b>MQSEC56VE</b>	27 <sup>13</sup> / <sub>16</sub>	707	64 <sup>3</sup> / <sub>4</sub>	1645	67 <sup>13</sup> / <sub>16</sub>	1723	24x60	610x1524	181	82

Note: Caster units use two 5PCX and two 5PCBX casters.

## MetroMax Heavy-Duty Mobile Units

Mounted on aluminum dolly with 5" (127 mm) plate casters and wraparound bumpers.

MetroMax (2) B5P (2) B5PB Casters	Actual Outside Dimensions (including handle)						Fits Shelf		Approx. Pkd. Wt.	
	Width		Length		Height		in.	mm	lbs.	kg
<b>MQSEC53LE</b>	28 <sup>1</sup> / <sub>16</sub>	713	39 <sup>1</sup> / <sub>8</sub>	994	68 <sup>1</sup> / <sub>2</sub>	1740	24x36	610x914	166	75
<b>MQSEC55LE</b>	28 <sup>1</sup> / <sub>16</sub>	713	51 <sup>1</sup> / <sub>8</sub>	1299	68 <sup>1</sup> / <sub>2</sub>	1740	24x48	610x1219	176	80
<b>MQSEC56LE</b>	28 <sup>1</sup> / <sub>16</sub>	713	63 <sup>1</sup> / <sub>8</sub>	1603	68 <sup>1</sup> / <sub>2</sub>	1740	24x60	610x1524	179	81

Note: Given height is for unit without dolly or casters (depending on model chosen).  
For approximate overall unit height add chosen caster diameter plus 1" (25 mm).



MetroMax® Security  
with hinge doors.

## Intermediate Shelves for Super Erecta Shelf Security Units

Metro Max i Shelf w/ Grid Mat.	Metro Max 4 Shelf w/ Grid Mat.	Metro Max Q Shelf w/ Grid Mat.	Width		Length	
Cat. No.	Cat. No.	Cat. No.	in.	mm	in.	mm
<b>MX2436G</b>	<b>MAX4-2436G</b>	<b>MQ2436G</b>	24	610	36	914
<b>MX2448G</b>	<b>MAX4-2448G</b>	<b>MQ2448G</b>	24	610	48	1219
<b>MX2460G</b>	<b>MAX4-2460G</b>	<b>MQ2460G</b>	24	610	60	1524

## Replacement Tri-Lobal Adapters for MetroMax Wire Security Shelves

Model No.


### MTLA\* - Four pair per bag

\*Not compatible with MetroMax Q security units manufactured prior to May 2009. For older MetroMax Q security units, use MQ9985 wedges if replacements are needed for the wire shelves.



**Super Erecta® Security Module**

Only for Standard 24" (610mm) Wide Super Erecta Shelf Wire Units.

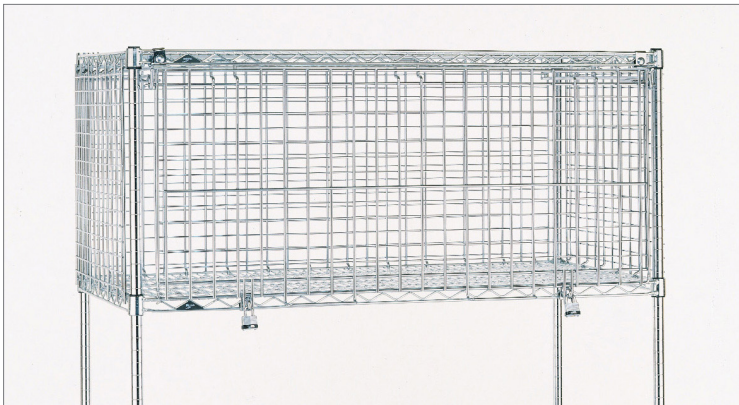

- Designed to convert a standard 24" (610 mm) wide unit into a combination of open and lockable shelving through the use of a kit.
- **Kit Includes:** Two end panels, one back panel and one door and slides. Fits between any two shelves spaced 20" (510 mm) apart on any Super Erecta Shelf Wire Unit with 24" (610 mm) wide shelves in 30", 48" and 60" (762, 1219 and 1524 mm) lengths.
- **Versatile:** Security Modules enclose only one section of the shelving unit, leaving the rest open for conventional use. Depending upon your needs, more than one Security Module can be used on the same shelving unit.
- **Ready View of Contents:** As with Metro's Security Trucks and Stationary Security Units, the heavy-gauge, open-wire construction of the Security Module keeps contents visible at all times, and makes inventory easy.
- **Convenient Door:** Has hasps for two padlocks and, when opened, slides under the upper shelf conveniently out of the way.
- **Choice of finishes:** Durable Chrome-Plated and Stainless Steel.

**Note:** Security Modules can be installed on 24" (610mm) wide Super Erecta Shelf wire shelves only. When multiple security modules are stacked on one shelving unit, separate top and bottom shelves are still necessary for each module.



*Two Security Modules on Stationary Unit*

**Super Erecta Security Module Kits**

Chrome Cat. No.	Stainless Steel Cat. No.	Length		Width		Height		Approx. Pkd. Wt.	
		in.	mm	in.	mm	in.	mm	lbs.	kg
<b>SECM2430NC</b>	<b>SECM2430NS</b>	30	760	24	610	20	510	29.5	14
<b>SECM2448NC</b>	—	48	1219	24	610	20	510	39.75	18
<b>SECM2460NC</b>	—	60	1524	24	610	20	510	45.75	21



# {14.01}



## Security Units Super Erecta® & MetroMax®

### Utility Cart Secure Storage

Corrosion Proof Model in Stainless Steel

- Corrosion Proof: Features stainless steel wire and solid shelves, security module, and posts.
- Easy to Maneuver: Includes two 5MP swivel casters and two 5MPB swivel/brake casters.
- Solid top shelf with raised ship's edge is ideal for use as a work surface and can contain unwanted spills
- Easy assembly in minutes.




### Super Erecta Security Module Kits

Cat. No.	Width		Length		Height		Load Rating		Approx. Pkd. Wt.	
	in.	mm	in.	mm	in.	mm	lbs.	kg	lbs.	kg
<b>SECMLAB</b>	24	610	30	760	39	990	600	273	85	38.6

### Other finishes and configurations are available:

Similar units can be constructed using chrome-plated components and galvanized solid Super Erecta shelves. Refer to the security modules on the previous page, and pair them with Metro SP series wire carts or your own combination of SES posts and shelves, for a customized solution. Security modules must be placed between two wire shelves.

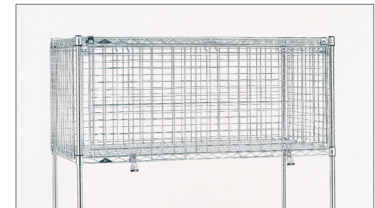

### Technical Information and Recommended Usage Guidelines for Security Units

#### Shelves:

- Solid shelves cannot be used as the top or bottom shelf on a security unit. For those applications requiring a solid bottom surface, Super Erecta Shelf inlays are recommended.
- It is recommended that standard Super Erecta shelves are used for the top and bottom shelves on a Super Erecta security unit.

#### Security Enclosure Panels:

- Grid spacing measures 13/4" x 13/4" (44 x 44mm).
- The distance from the top of the top shelf to the top of the bottom shelf measures approximately 57" (1448mm).

#### Mobile Units:

- 18" (457mm) deep security units must be used with casters that have a diameter of 5" (127mm) or less.
- Order aluminum split sleeves with c-rings for use with the top and bottom SES shelves of a mobile unit for applications that require a more rigid assembly. (9986Z for aluminum sleeves with zinc c-rings; 9986S for aluminum sleeves with stainless c-rings)

#### Use with other Metro components:

- Tray slides (15SNC, 20SNC) measure approximately 23" (584mm) in height. A standard security unit can accommodate 2 levels of these tray slides.

- Metro's brake/lock plate caster system can be used with 24" (610mm) deep security mobile units featuring a dolly base.
- Solid SES shelves can be used as interior shelves on a security unit. Wire shelves must be used as the top and bottom shelves.
- A push handle is available through Custom Engineering for the 24" (610mm) deep SES security units (subject to custom order minimums). Handle is available in chrome finish (Part # CC2835N).